

KDE-3750M-60 Diesel Generator Set



General Features



- Engine (MTU 20V4000G44S), Radiator 40°C max, belt driven fans, with safety guard
- 24V charge alternator
- Alternator (Leroy Somer LSA53.2M12), single bearing alternator IP23, insulation class H/H
- Skid and vibration isolators
- Dry type air filter, fuel filter, oil filter
- Main line circuit breaker
- Standard control panel
- Four 12V batteries, rack and cable
- Ripple flex exhaust pipe, exhaust siphon, flange, industrial muffler

PHOTO FOR REFERENCE ONLY



Technical Data

Output Frequency	60 Hz
Rated Speed	1800RPM
Prime Power	3450KVA/2760
Standby Power	KW
Rated Voltage	3750KVA/3000
Phase	KW 440/254V
Power Factor	3
Fuel Consumption 100% Load	0.8
Fuel Consumption 75% Load	200g/Kwh
Fuel Consumption 50% Load	194g/Kwh
Operation Altitude	204g/Kwh
Ambient Temperature	≤1000m ≤40°C

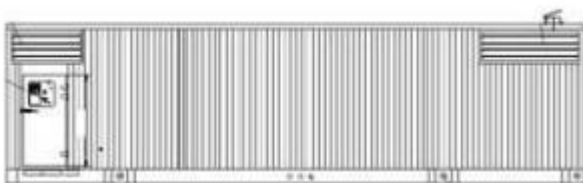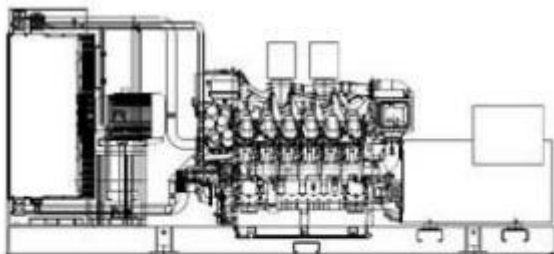

Dimension and Weight

Genset Type	Open Frame	Soundproof Containerized
Length(L) (mm)	7350	ISO 40ft HQ
Width(W) (mm)	2200	ISO 40ft HQ
Height(H) (mm)	2830	ISO 40ft HQ
Gross Weight (kg)	25000	33000

KDE-3750M-60 Diesel Generator Set Powered by

Engine Specification

Manufacturer / Model:	MTU 20V4000G44S
Air Intake System:	Turbo, Water/Air Cooling
Fuel System:	Electronic Fuel Injection System
Cylinder Arrangement:	20 in V
Displacement:	95.4L
Bore and Stroke:	170*210 (mm)
Compression Ratio:	16.4:1
Rated RPM:	1800rpm
Nominal Power at Rated RPM:	3010KW
Governor Type:	ADEC
Exhaust Gas Flow:	684m ³ /min
Exhaust Temperature:	490°C
Max Back Pressure:	8.5kPa
Max Intake Restriction:	5kPa
Burning Capacity:	258m ³ /min
Total Oil Capacity:	390L
Oil Consumption:	0.3% Fuel Consumption
Engine Coolant Capacity:	255L
Max Water Temperature:	104°C

Alternator Specification

Manufacturer / Model:	LEROY SOMER LSA 53.2 M12
Number of Phase:	3
Connecting Type:	3 Phase and 4 Wires, "Y" type connecting
Number of Bearing:	1
Protection Grade:	IP23
Exciter Type:	Brushless, self-exciting
Insulation Class, Temperature Rise:	H/H
Telephone Interference Factor (TIF):	< 50
THF:	< 2%
Voltage Regulation, Steady State:	≤ ± 1%
Alternator Capacity:	3575KVA
Alternator Efficiencies:	96.6%
Air Cooling Flow:	2.5m ³ /s

KDE-3750M-60 Diesel Generator Set Powered by

Control System

Standard Deepsea DSE6020 Auto Mains Failure Control Panel

- Auto Mains (Utility) FailureControl Module suitable for a widevariety of singlegenset applications.
- Displays warnings, shutdownand engine status info onthe back-lit LCD screen, illuminatedLEDs, remote PC. Monitors themains (utility) supply. Includes USB, RS232 and RS485ports for systemexpansion.
- Compatible withelectronic and non-electronicengines and offerflexible inputs,outputs and engineprotections to meet extensive industry requirements.
- Includes enhanced event andperformance monitoring, remotecommunicationsto reduceengine wear.It can eitherbe programmed using the frontpanel or by using DSEPC software.



Optional Deepsea DSE8610 Auto Paralleling Control Panel

- Synchronizing Auto Start Control Module for multi-genset loadshare system,designed to synchronize up to 32gensets including electronic andnon-electronic engines.
- Monitors thegenset and indicates operationalstatus and fault conditions,automatically starting or stoppingthe engine on load demand or faultcondition.
- System alarms are annunciated onthe LCD screen, illuminated LEDand audible sounder.
- Records 250 events logformaintenance.Extensivemonitoring, metering andprotection features are includedas well as comprehensivecommunication and systemexpansion options.
- UsingDSE PC Software allowsalteration of the operationalsequences, timers, alarms withallcommunication portsactive.



KDE-3750M-60 Diesel Generator Set

Powered by



Optional

Engine

- Water Jacket Preheater
- Water Separator
- Oil Pump
- Oil Preheater
- Battery Charger

Fuel System

- Daily Fuel Tank
- External Fuel Tank
- Auto Fuel Filling System
- Fuel Level Sensor

Control System

- Auto Remote Control Panel
- AMF Function Control Panel
- Auto Paralleling Control Panel
- Auto Transfer Switch (ATS)
- ABB breaker

Alternator

- Anti Condensation Heater
- Permanent Magnet Generator
- Winding Temp Sensor

Enclosure

- Rainproof Type
- Soundproof Rental Type
- Mobile Type

Available Voltages

- 440/254V
- 415/240V
- 380/220V

Reference Standards

Generator Set: ISO 8528, CE

Engine: ISO 3046, BS 5514, DIN 6271

Alternator: BS EN 60034, IEC34, BS5000, NEMA MG1-32, VDE 0530, CSA C22.2-100, AS1359

Warranty

KNOX Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: A. 15 months, counted on the day KNOX sold to the first buyer; B. One year after installation; C. 1000 running hours (accumulated); subject to the earlier one.

Service and spare parts are available from KNOX Power or distributors in your location.